




快速入门指南

Quick Start Guide


型号: UTWS5

Instructions for multifunction button of the earhook

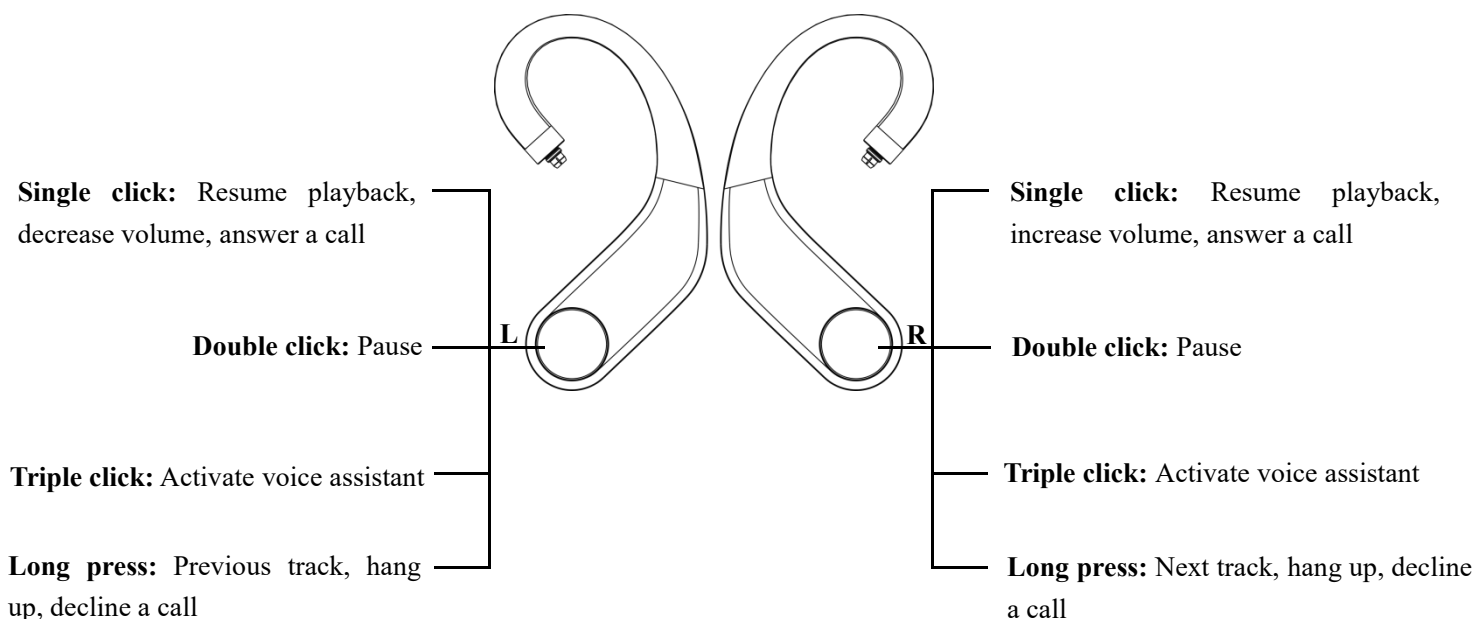


Instructions for multifunction button of the charging case & indicator light

(Notes: Before using, please tear the insulated gummed paper off on the metal contact of the earhook.)

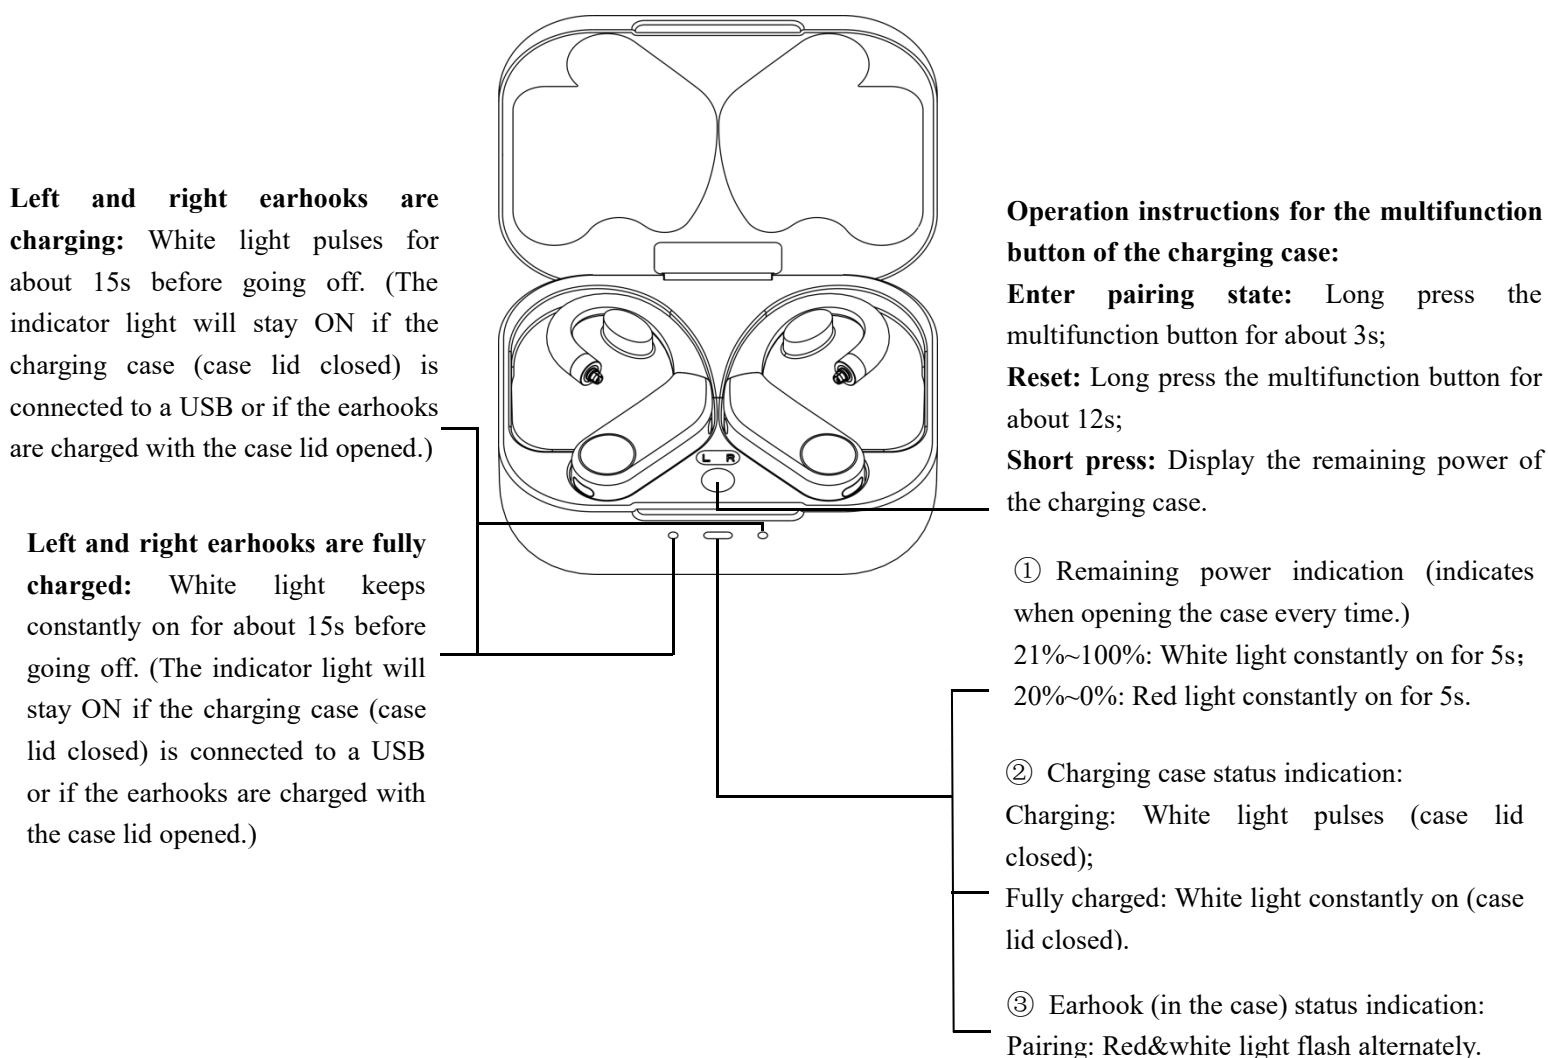

Charging port of the charging case

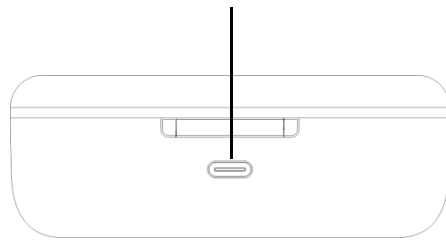

Notes:

- 1) *When the charging case is opened, the earhooks will power on and enter the pairing/reconnecting state, which means they can be searched for and connected to.*
- 2) *After taking the 2 earhooks out of the charging case and then putting them back, they will enter the charging state. The corresponding indicator light of the charging case indicates the charging state of each earhook.*
- 3) *When opening the case, the middle indicator light will indicate the remaining power of the charging case.*

Power on

- 1) When opening the charging case, the UTWS5 will turn on automatically. (The one never been connected will auto-enter pairing state when powering on for the first time.)
- 2) If the UTWS5 is outside the charging case (off state), hold the multifunction button for about 1s to turn it on. After being turned on, it can automatically reconnect to the last-connected device.

Power off

If the UTWS5 is outside the case (on state), hold the multifunction button for about 5s to turn it off. Or to turn it off in the Settings menu of the FiiO Control APP.

Pairing mode

- 1) If the UTWS5 is inside the charging case, it can enter pairing state by pressing the multifunction button on the case for about 3s after opening the case.
- 2) If the UTWS5 is outside the case, it can enter pairing state by corresponding operation in the Settings menu of the FiiO Control APP.

(Note: When the charging case is opened over 3 minutes, the UTWS5 will no longer respond to any commands of the multifunction button of the case. So please keep the UTWS5 in the case and operate it within valid time.)

Factory data reset/Bluetooth pairing

Keep the UTWS5 inside the charging case. Open the case and long press the multifunction button on the case for about 12s. The earhook will turn off and later turn on automatically to start the TWS pairing (left and right earhook pair with each other). Once the TWS pairing succeeds, the indicator light in the middle of the case will flash in red and white alternately. Under this state, the UTWS5 can be searched for and connected to. In the Bluetooth list of the Bluetooth device, search for "FiiO UTWS5" and click it to complete the connection. After the connection succeeds, it can be used normally.

(Notes: First make sure the TWS pairing is successful. Otherwise the UTWS5 can not be discovered by any Bluetooth devices.)

FiiO Control

The FiiO UTWS5 can be controlled by the FiiO Control APP. Go to the APP market, searching for "FiiO Control" to download it. EQ setting, OTA upgrade, volume adjustment and many other features are all available in FiiO Control.

Notes and Precautions

- ★ It is recommended to charge the device using a standard 5V charger or charger that could output 1A current or above.
- ★ Please do not place the device in circumstances of excessive high/low temperatures (above 45°C or below 0°C).
- ★ Bluetooth wireless technology has a working scope of approximately 10 meters. Transmission distance is affected by obstacles (human, metal objects, walls, etc.) or electromagnetic environments, which may lead to noise or audio loss.
- ★ Prolonged use of high volume may result in permanent hearing loss. Switching between audio sources may cause a sudden change in volume. Please turn the headphone volume to a lower level before wearing it.
- ★ If the device is to be left unused for a long time, please recharge it periodically to preserve its battery life.
- ★ Please do not disassemble, damage the battery, or drop it into fire; it is prohibited to continue using after the battery is soaked in water.
- ★ Please do not wear headphones when walking or riding, so to avoid accidents.

List of Items Included

UTWS5

Charging case

Quick Start Guide

Warranty card

Type C USB cable

Learn More

To learn more about the product, please visit our website: www.fiio.com

For related product service, please visit <https://www.fiio.com/supports>

WEEE Directive & Product Disposal



At the end of its serviceable life, this product should not be handed as household or general waste. It should be handed over to the applicable collection point for the recycling of electrical and electronic equipment, or returned to the supplier for disposal.

Internal/Supplied Batteries:

This symbol on the battery indicates that the battery is to be collected separately. This battery is designed for separate collection at an appropriate collection point.

Qualcomm is a trademark of Qualcomm Incorporated, registered in the United States and other countries. aptX is a trademark of Qualcomm Technologies International Ltd., registered in the United States and other countries.